

LightFlex 120



Features

- 120 high power LEDs per metre
- SMD 335 LED chip
- Low heat, no UV or IR light radiation
- Supplied in custom lengths.

Specification

Input Voltage (Volts DC)	12 (24 available)
LED	120/m
Power	14.4 W/m
Colour Temperature (CT)	2700K, 3000K, 4500K, 6500K
CRI	83, 93
Other colours available	red, green, blue, amber
IP Rating	IP20, IP65
LED Estimated Life Span	30,000 Hrs
LED type	Epistar
Beam Angle	120°
Operating Temperature	-20°C to 40°C
Weight	Length dependent
Length (mm)	5000 (excluding cable)




Light Output (lumen/metre of LED internal)

	120 LED
3000k	1200
4500k	1320
6500k	1500



Specification guide

	IP Rating	Voltage	Colour
LightFlex/ 120	_____ /	_____ /	_____ /

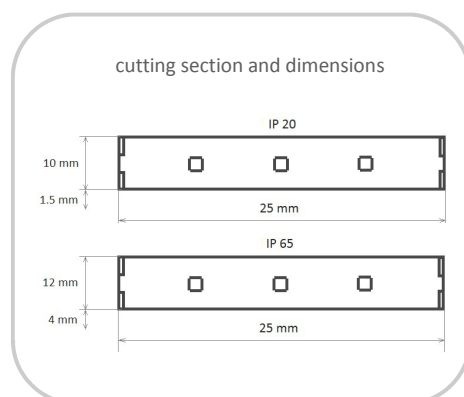

Multiple control gear options available

Installation.

For ease of installation we recommend our clear U-channel which is self adhesive or can be screwed into place depending on the surface. The IP65 LightFlex has a silicon based sleeve so for extra adhesion we also recommend that neutral cure clear silicon is applied.



Product specification subject to change without prior notice.