

LightFlex 120E



Features

- 120 high power LEDs per metre
- Low heat, no UV or IR light radiation
- Supplied in custom lengths
- Dimmable

Specification

Input Voltage (Volts DC)	12 (24 available)
Input Current	0.8 A/m
LED	120 /m
Power	9.6 W/m
Colour Temperature (CT)	2700K, 3000K, 4500K, 6500K
CRI	>80
Other colours available	red, green, blue, amber
IP Rating	IP20, IP65
LED Estimated Life Span	50,000 Hrs
LED type	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C




Light Output (lumen/metre of LED internal)

	120E LED
3000K	640
4500K	660
6500K	780

Specification guide

	IP Rating	Voltage	Colour
LightFlex/ 120E	_____ /	_____ /	_____ /

cutting section and dimensions

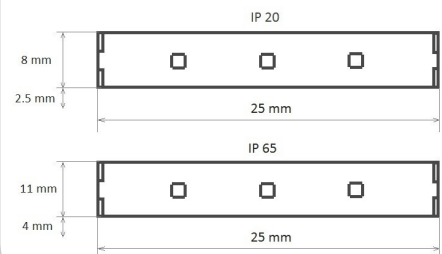

Multiple control gear options available

Installation.

For ease of installation we recommend our clear U-channel which is self adhesive or can be screwed into place depending on the surface. The IP65 LightFlex has a silicon based sleeve so for extra adhesion we also recommend that neutral cure clear silicon is applied.



Product specification subject to change without prior notice.