

LightFlex 60 RGB



Features

- Can be controlled to produce almost any colour.
- 60 high power RGB LEDs per metre
- High efficiency SMD optic
- Low heat, no UV or IR light radiation
- Supplied in custom lengths
- Dimmable


Specification

Input voltage (Volts DC)	12 (24 optional)
Input Current (Amps per metre)	1.4
LED	60/m
Power	14.4 W/m
Light Output	500 lm/m
IP Rating	IP20, IP65
LED Estimated Life Span	50,000 Hrs
LED type	Epistar
Beam Angle	120°
Optics	5060 Superflux package
Operating Temperature	-20°C to 40°C
Weight	Length dependent
Length (mm)	5000 (excluding cable)



Specification guide

		IP Rating	Voltage
LightFlex/	60 RGB	____/	____/

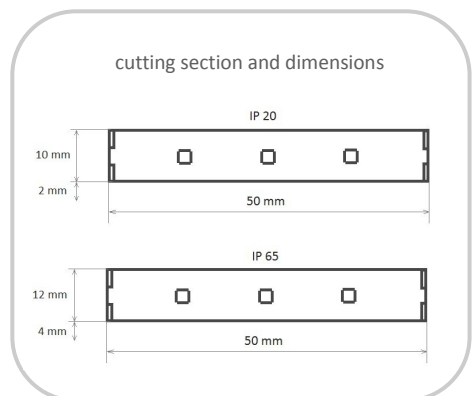

Multiple control gear options available

Installation.

For ease of installation we recommend our clear U-channel which is self adhesive or can be screwed into place depending on the surface. The IP65 LightFlex has a silicon based sleeve so for extra adhesion we also recommend that neutral cure clear silicon is applied.



Product specification subject to change without prior notice.