


LightFlex RGBW 4 in 1.



Features.

- 4 in 1 chip
- Can be controlled to produce almost any colour.
- 60 high power RGB W LEDs per metre
- High efficiency SMD optic
- Low heat, no UV or IR light radiation
- Supplied in custom lengths
- Dimmable

Accessories:

Multiple control gear options available


Specification.

Input voltage	12 VDC 24 VDC optional
Input Current	1.6 A / m at 12V 0.8 A / m at 24V
LED	60 / m
Power	19.2 W / m
IP Rating	IP20
LED Estimated Life Span	50,000 Hrs
LED type	Epistar
Beam Angle	120°
Operating Temperature	-20°C to 40°C
Cut Section	50mm at 12V 100mm at 24V

Light Output.

(lumen/metre of LED internal)

	60 LED
RGB + 3000K	850
RGB + 4500K	880
RGB + 6500K	900

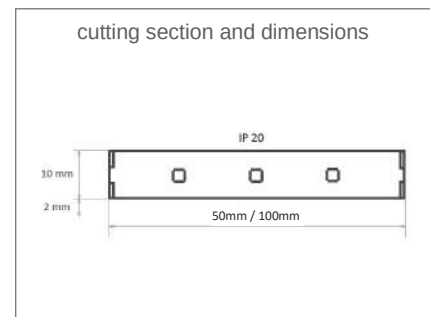

Product specification subject to change without prior notice.

