

LightFlex RGB x



Features

- Four colours available on one strip.
- Flexible to almost any angle
- Low temperature
- Low power consumption
- Supplied in custom lengths
- Dimmable

Specification

Input Voltage (Volts DC)	12 (24 available)
LED	60/m
Power	14.4 W/m
IP Rating	IP65
LED Estimated Life Span	50,000Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20° to 40°C



Light Output (lumen/metre of LED internal)


		Warm white	1240 lm/m
		Neutral White	1300 lm/m
		Cool white	1400 lm/m
		Red	720 lm/m
		Green	1200 lm/m
		Blue	360 lm/m
		Amber	720 lm/m



Specification guide

	Colour	IP Rating	Voltage
LightFlex/	RGB	____/	____/

cutting section and dimensions

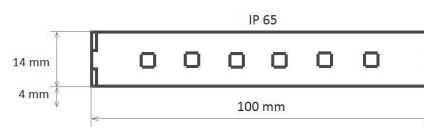

Multiple control gear options available

Product specification subject to change without prior notice.