



LightLine BH.



MADE IN BRITAIN

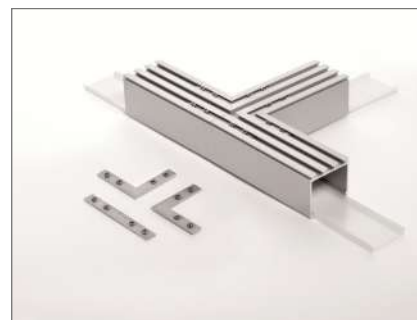

Features.

Extruded anodised aluminium in bespoke lengths
 Suitable for recessed and dry wall installations
 Easy installation with spring clips
 Up to 2100 lumens per metre
 Limitless wall and ceiling combinations
 Tee and cross sections available
 Multiple light output options – white / colour

Accessories.

Mounting springs
 End caps
 Connectors 180°, 135°, 90°


Specification.

| | |
|------------------------|---------------------------------------|
| Input Voltage | 12 VDC 24 VDC on request |
| LED | 60, 120e, 120 |
| Power | 4.8, 9.6, 14.4 W / m |
| Colour Temperature | 2300K, 2700K, 3000K 4500 K, 6500 K |
| 3ch and 4ch options | RGB, RGB-W, RGB-A |
| Covers | Clear, Opal |
| IP Rating | IP50, IP54, IP65 |
| CRI | 83, 93 |
| Estimated LED Lifespan | 50,000 Hrs |
| LED | Epistar |
| Beam Angle | 120° |
| Operating Temperature | -20°C to +45°C |

Light Output.

(lumen/metre of LED internal)

| | 60 LED | 120e LED | 120 LED |
|-------|--------|----------|---------|
| 3000K | 310 | 640 | 1200 |
| 4500K | 320 | 660 | 1320 |
| 6500K | 380 | 780 | 1500 |

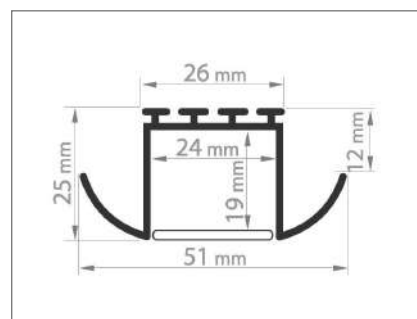

Product specification subject to change without prior notice.

