



LightLine Cala H.



MADE IN BRITAIN

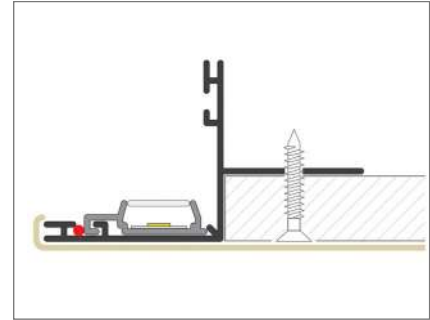

Features.

Extruded anodised aluminium in bespoke lengths
Cala Hybrid is a set of two profiles designed
For recess illumination purposes
It consists of aluminium profile and extruded LED
strip housing secured by use of silicon feed to
create a complete set
The complete set enables the parallel or
perpendicular direction of light to the wall
The strip is step-shaped, which makes possible
drywall edge mounting
The lower edge of the strip is an extension of the
recess and once sealed, forms a thin aesthetic
edge

Accessories.

Multiple control gear options available


Specification.

Voltage	12 VDC 24 VDC on request
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature	2300K, 2700K, 3000K, 4500K, 6500K
Covers	Clear, Opal
IP Rating	IP50, IP54, IP65, IP67
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

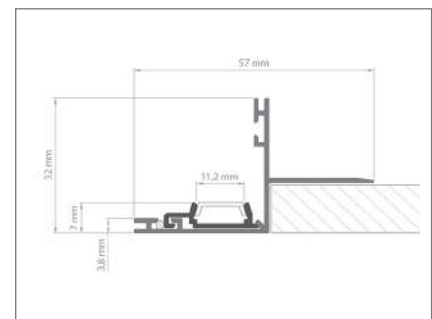

Product specification subject to change without prior notice.

