


LightLine NF.



MADE IN BRITAIN



Features.

- Extruded anodised aluminium in bespoke lengths
- Suitable for recessed and dry wall installations
- Easy installation with spring clips
- Up to 2100 lumens per metre
- Limitless wall and ceiling combinations
- Tee and cross sections available
- Multiple light output options – white / colour

Accessories.

- Standard and swivel mounting clips
- Mounting springs
- Mounting channel
- Conductive suspension kit
- Connectors 180°, 135°, 90°


Specification.

Input Voltage	12 VDC 24 VDC on request
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature	2300K, 2700K, 3000K 4500 K, 6500 K
3ch and 4ch options	RGB, RGB-W, RGB-A
Covers	Clear, Opal
IP Rating	IP50, IP54, IP65
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

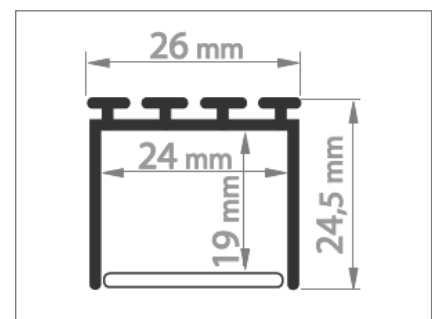

Product specification subject to change without prior notice.

