


LightLine Pipe.



MADE IN BRITAIN



Features.

Extruded anodised aluminium in bespoke lengths
 Unique cylindrical cross section
 Can be surface mounted or suspended
 Compatible with our electronically conductive mounting system
 Multiple light output options – white or colour

Accessories.

Standard mounting clips
 Swivel mounting clips
 End caps
 Conductive end caps
 Proximity switch
 Suspension kit


Specification.

Input Voltage	12 VDC 24 VDC on request
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature	2300 K, 2700 K, 3000 K 4500 K, 6500 K
3ch and 4ch options	RGB, RGB-W, RGB-A
Cover	Clear, Opal
IP Rating	IP50, IP54, IP65, IP67
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

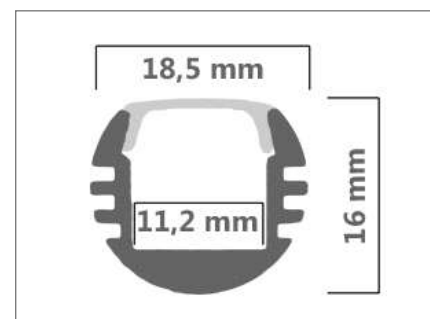

Product specification subject to change without prior notice.



MJ Lighting Technology Ltd

www.mjlighting.com

sales@mjlighting.com

+44 1829 741 702