
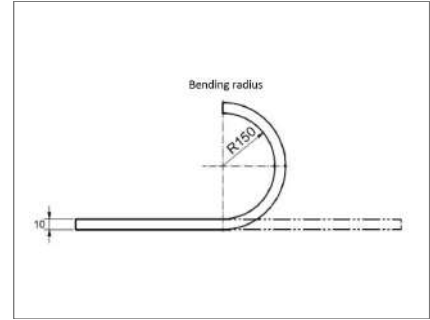


LightFlex Curve HB.



Features.

- Flexible Homogenous LED Linear
- High quality
- Single colour
- High brightness
- Fully encapsulated
- Small bend radius of just 15cm (only one axis)
- Resistant against water, UV radiation, chemicals and abrasion
- Clear or Opal Cover options, IP67
- Supplied in custom lengths only
- Dimmable

Accessories.

- Standard mounting clips
- Mounting channel


Specification.

Input Voltage	24 VDC
Power	22 W / m
LEDs	66 / m
Colour	2700K, 3000K, 4000K 6200K
Max continuous length	3980 mm
IP Rating	IP67 (IP68 available)
LED Estimated Life Span	50,000 Hrs
CRI	≥ 85
Beam Angle	120°
Operating Temperature	-20° C to +70° C

Light Output.

(lumen/metre of LED internal)

Warm white	2700K	777 lm/m
Warm white	3000K	777 lm/m
Neutral white	4000K	899 lm/m
Cool white	6200K	872 lm/m

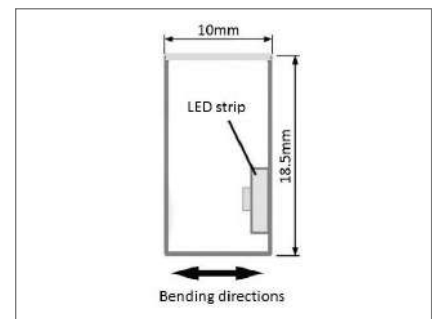

Product specification subject to change without prior notice.

