


LightFlex RGB 3 in 1.



Features.

3 in 1
Can be controlled to produce almost any colour.
60 high power RGB LEDs per metre
High efficiency SMD optic
Low heat, no UV or IR light radiation
Supplied in custom lengths
Dimmable

Accessories:

Multiple control gear options available


Specification.

| | |
|-------------------------|-----------------------------|
| Input voltage | 12 VDC 24 VDC optional |
| Input Current | 1.2 A / m |
| LED | 60 / m |
| Power | 14.4 W / m |
| Light Output | 300 lm / m |
| IP Rating | IP20, IP65 |
| LED Estimated Life Span | 50,000 Hrs |
| LED type | Epistar |
| Beam Angle | 120° |
| Operating Temperature | -20°C to 40°C |
| Cut section | 50mm at 12V 100mm at 24V |
| Length | 5000 mm |

Light Output.

(lumen/metre of LED internal)

| | |
|-----|--------|
| | 60 LED |
| RGB | 300 |

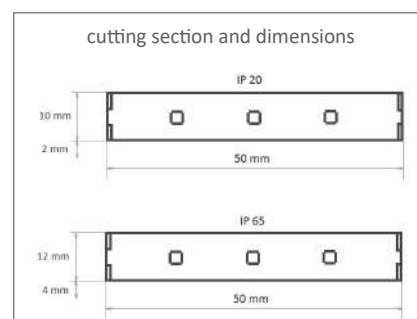

Product specification subject to change without prior notice.

