
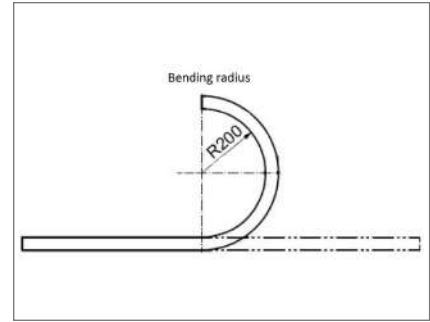


LightFlex Wave HB.



Features.

Unique design giving a homogenous glow
 Small bend radius of just 15cm
 (only one axis)
 Resistant against water, UV radiation,
 chemicals and abrasion
 Clear or Opal Cover options
 Supplied in custom lengths only
 Dimmable

Accessories.

Standard mounting clips
 Mounting channel


Specification.

Input Voltage	24 VDC
Input Current	0.75 A / m
Power	17 W / m
IP Rating	IP67 (IP68 available),
LED	100 / m
LED Estimated Life Span	50,000 Hrs
CRI	85
Beam Angle	120
Operating Temperature	-20° C to 45° C
Max operating length	7580 mm

Light Output.

(lumen/metre of LED internal)

Warm white	2800K	1252 lm/m
Warm white	3200K	1296 lm/m
Neutral white	4200K	1458 lm/m
Cool white	6500K	1414 lm/m

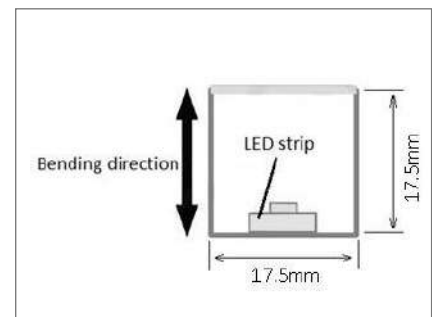

Product specification subject to change without prior notice.

