


# LightLine Deep



MADE IN BRITAIN



## Features.

Extruded anodised aluminium in bespoke lengths.  
 Domed lens covers to maximise beam angle  
 Multiple beam options available  
 Homogenous glow achievable  
 Ideal for surface mounting  
 Swivel feature achievable  
 Wide range of colours available

## Accessories.

Multiple control gear options available


## Specification.

Input Voltage (Volts DC)	12, (24 on request)
LED	60, 120e, 120, 204,
Power (Watts per metre)	4.8, 9.6, 14.4, 24.5
Colour Temperature	2300 K, 2700 K, 3000 K, 4500 K, 6500K
3ch and 4ch options	RGB, RGB-W, RGB-A
Covers	Clear, Frosted, Opal, 10°, 30°, 60°, 90°
IP Rating	IP50, IP54, IP65, IP67
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar

## Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED	204 LED
3000K	310	640	1200	1540
4500K	320	660	1320	1980
6500K	380	780	1500	2100

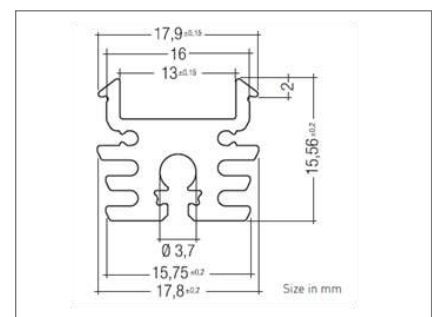

Product specification subject to change without prior notice.



MJ Lighting Technology Ltd

www.mjlighting.com

sales@mjlighting.com

+44 1829 741 702