


LightLine Graze 90.



MADE IN BRITAIN



Features.

Extruded anodised aluminium in bespoke lengths,
Cove light profile with integrated cable duct for indirect lighting where there is no existing cove on site
Multiple light output options – white / colour
Homogenous glow with 120 and 204 LED pitch
Flush fitting cover

Accessories.

Standard mounting clips
End caps
Proximity switch


Specification.

Input Voltage	12 VDC (24 on request)
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature (CT)	2300K, 2700K, 3000K, 4500K, 6500K
3ch options	RGB
Covers	Clear, Frosted Clear 30°, Frosted 30°
IP Rating	IP50, IP54, IP65, IP67
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°, 30°
Operating temperature	-20°C to +45°C

Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	260	640	850
4500K	290	660	1080
6500K	320	780	1220

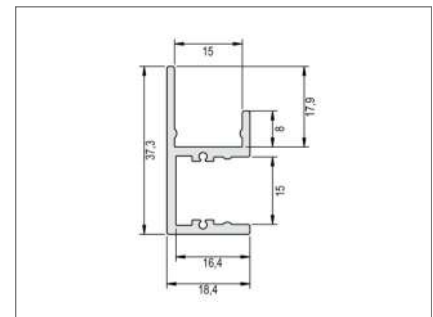

Product specification subject to change without prior notice.

