


LightLine Mini Slim.



MADE IN BRITAIN



Features.

Extruded anodised aluminium in bespoke lengths
Profile is designed to build flat lighting fixtures for universal use
Mainly used to illuminate cupboards, stairs, shop windows, etc
Only 6mm deep
Multiple light output options – white or colour.
Compatible with our electronically conductive mounting system

Accessories.

Standard and swivel mounting clips
Conductive end caps
Proximity switch
Suspension kit


Specification.

Input Voltage	12 VDC 24 VDC on request
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature	2300 K, 2700 K, 3000 K, 4500 K, 6500 K
3ch	RGB
Covers	Clear, Opal
IP Rating	IP50, IP54, IP65, IP67
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

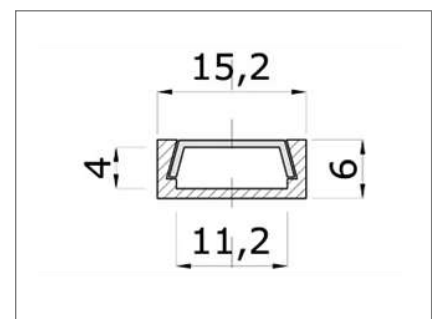

Product specification subject to change without prior notice.



MJ Lighting Technology Ltd

www.mjlighting.com

sales@mjlighting.com

+44 1829 741 702