




LightLine Rico.

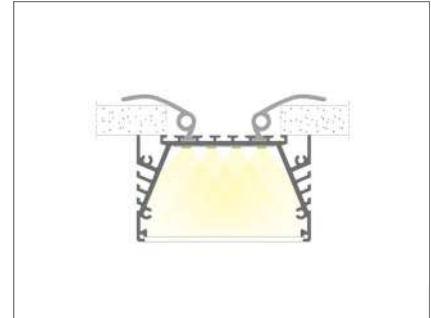

MADE IN BRITAIN

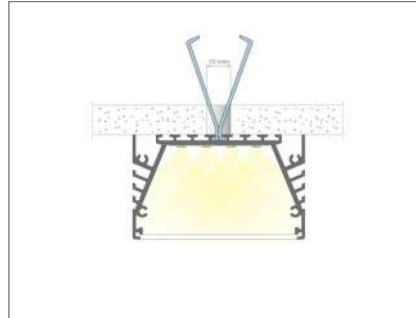

Features.

Extruded anodised aluminium in bespoke lengths
 Dedicated for a max of 4 LED strips
 not wider than 10.8 mm each.
 A line of light effect is achieved when used
 with the opal cover
 The internal shape is optimized to increase
 the LED fixture cooling capability and
 proper light distribution
 Can be suspended from the ceiling as independent
 lamp or can be attached directly to the ceiling
 Power handling capability is high enough to
 consider this lamp as main lighting LED fixture

Accessories.

End caps
 Mounting springs


Specification.

Input Voltage	12 VDC, 24 VDC on request
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m (per row)
Colour Temperature	2300 K, 2700 K 3000 K, 4500 K 6500 K
3, 4 channel	RGB, RGB-A RGB-W (3 rows)
Covers	Frosted, Opal
IP Rating	IP50, IP54, IP65
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

Light Output.

(lumen/metre run of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

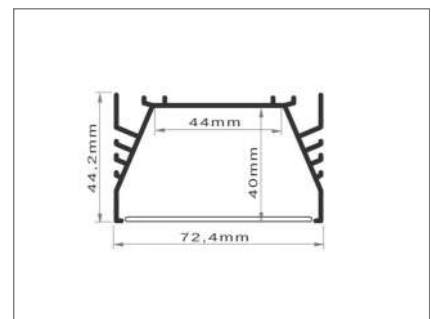

Product specification subject to change without prior notice.

