
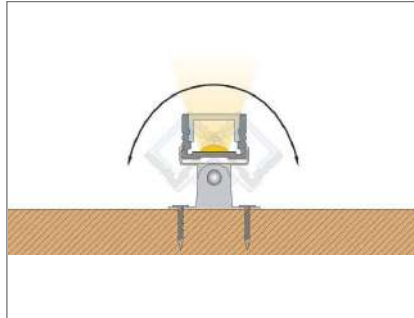
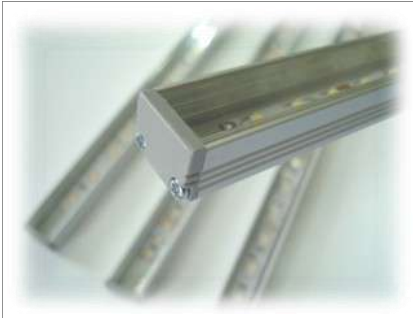


# LightLine Square.



## Features.

Extruded anodised aluminium with integrated cable duct  
 Designed to give homogenous illumination over 180° due to the semicircle cover  
 Easily fitted with the robust clips

## Accessories.

Multiple control gear options available  
 Standard mounting clips  
 Swivel mounting clips  
 Metal & plastic end caps


## Specification.

Input Voltage	12, 24 VDC
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature	2700K, 3000K 4500K, 6500K
3 channel	RGB
Covers	clear / opal
IP Rating	IP20, IP54, IP67
CRI	83, 93
Estimated LED Lifespan	50,000 Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

## Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

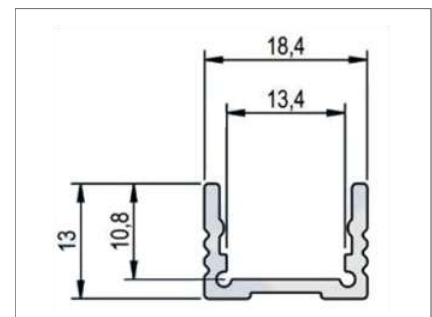

Product specification subject to change without prior notice.

