


LightLine Trilight.



MADE IN BRITAIN



Features.

Extruded anodised aluminium in bespoke lengths
Ideal for shelf illumination
45° mounting
Surface mounted with easy installation
mounting clips
Multiple light output options – white / colour

Accessories.

Standard mounting clips
Swivel mounting clips
End caps
Conductive rods
Proximity switch


Specification.

Input Voltage	12 VDC 24 on request
LED	60, 120e, 120
Power	4.8, 9.6, 14.4 W / m
Colour Temperature	2300K, 2700K, 3000K 4500K, 6500K
3ch	RGB
Covers	Clear, Opal
IP Rating	IP50, IP54, IP65, IP67
CRI	83, 93
Estimated LED Lifespan	50,000Hrs
LED	Epistar
Beam Angle	120°
Operating Temperature	-20°C to +45°C

Light Output.

(lumen/metre of LED internal)

	60 LED	120e LED	120 LED
3000K	310	640	1200
4500K	320	660	1320
6500K	380	780	1500

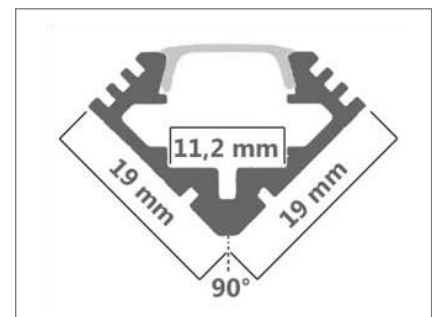

Product specification subject to change without prior notice.



MJ Lighting Technology Ltd

www.mjlighting.com

sales@mjlighting.com

+44 1829 741 702