

UpLight Mini




Features

- Marine grade 316 Stainless Steel with toughened glass front
- Sophisticated heat sink with excellent thermal efficiency
- Low heat, no UV or IR light radiation
- Full range of light output colours
- Walk-over, or can be rebated into furniture or walls
- Constant current lights need to be wired in series
- Dimmable


Specification

Input Current	350mA
Power	1 W
Colour Temperature (CT)	2700K, 3000K, 4500K, 6500K
Colours available	R / G / B / A
Beam angle	120°
Glass	clear, opal
IP Rating	IP64, IP67
CRI	83
Estimated LED Lifespan	>50,000Hrs
LED	1xRebel
Operating Temperature	-20°c to 40°c

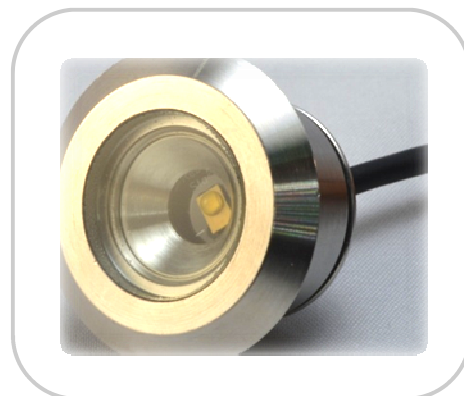


Light Output

	1x Rebel
2700k	70
3000k	80
4500k	100
6500k	120

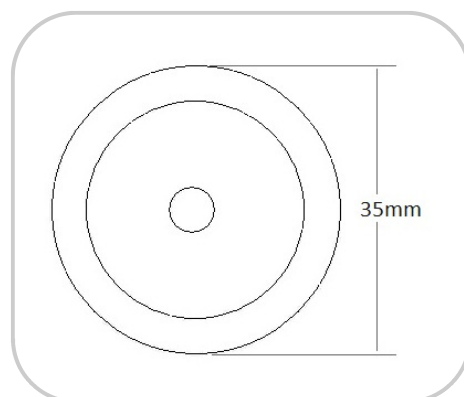

Specification guide

		CT	Glass	Optic	IP Rating
UpLight	Mini	___/	___/	___/	___/

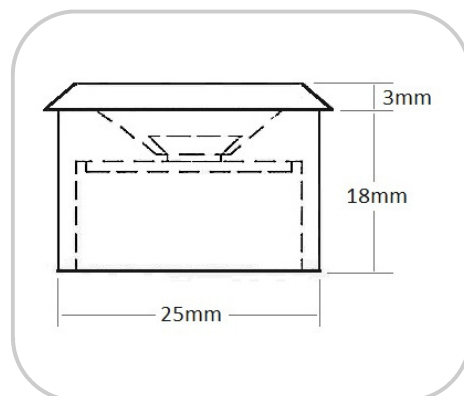

Accessories

- Suitable drivers:
- Trailing edge, 1-10 Volt, DMX
- P400 IP68 cable connector
- Installation sleeve



Product specification subject to change without prior notice.